

WT-RC□□-NF

■SPECIFICATIONS

- Suitable for FCC,FIZ
- Confidency by metal case
- Excellent Filtering
- Low leakage
- Confidency by Epoxy Coverage
- Best characteristic in high voltage




■APPLICATIONS

- AVR,UPS,INVERTER,CONVERTER ETC
- FACTORY AUTOMATION PRODUCT LINE
- MOTOR-DRIVEN Equipments
- OA Equipments
- Measuring Equipments
- Numerical Control Equipments

■SPECIFICATIONS

MODEL	WT-RC05 - NF	WT-RC06 - NF	WT-RC10 - NF	WT-RC15 - NF	WT-RC20 - NF
RATED CURRENT	5A	6A	10A	15A	20A
RATED VOLTAGE	250 VAC				
TEST VOLTAGE	2,500V 10mA between I/O terminals and Earth for 1 minute				
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and case				
LEAKAGE CURRENT	1mA Max				
TEMPERATURE RISE	30°C Max				
OPERATING TEMPERATURE	-25 ~ +85°C				

■Block Diagram

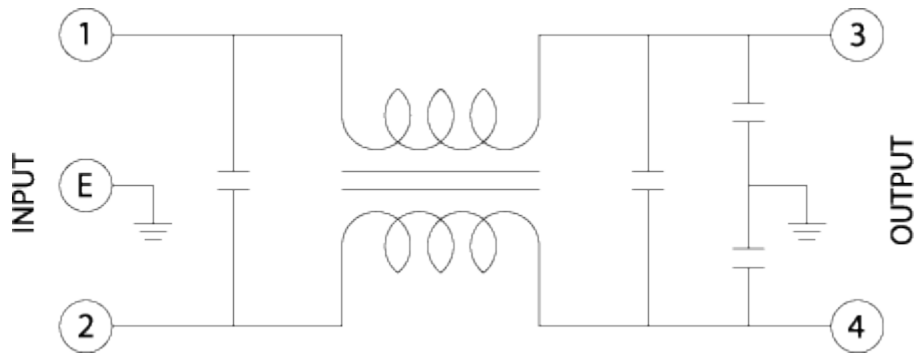

■ Dimensions (Units:mm)

