

WT-RC□□-PG

SPECIFICATIONS

- Small and Compact
- PCB Mount
- economically Special Structure
- Can be mounted Y-Capacity

APPLICATIONS


- Digital Equipments
- Personal Computer and peripherals
- Measuring and Medical Equipments
- Communication Equipments
- Industrial Equipments



SPECIFICATIONS

MODEL	WT-RC01-PG	WT-RC02-PG	WT-RC03-PG	WT-RC06-PG
RATED CURRENT	1A	2A	3A	6A
RATED VOLTAGE	250 VAC			
TEST VOLTAGE	2,500V 10mA between I/O terminals and Earth for 1 minute			
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and case			
LEAKAGE CURRENT	0.5mA Max			
TEMPERATURE RISE	30°C Max			
OPERATING TEMPERATURE	-25 ~ +85°C			

Block Diagram

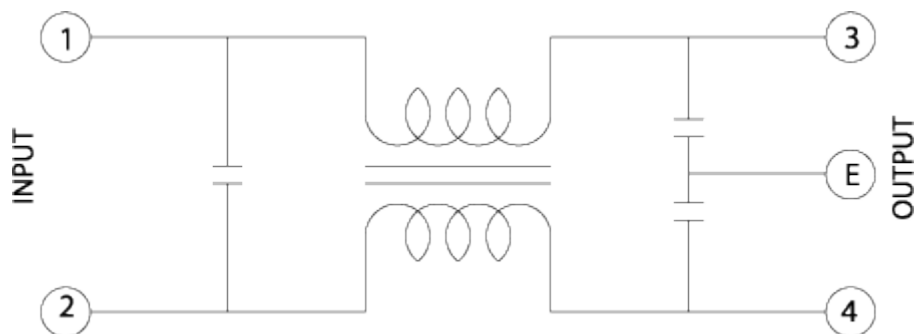

Dimensions (Units:mm)

