

WT-RC□□-SF(1)

SPECIFICATIONS

- Suitable for FCC,FIZ
- Confidency by metal case
- Excellent Filtering
- Low leakage
- Confidency by Epoxy Coverage
- Best characteristic in high voltage




APPLICATIONS

- AVR,UPS,INVERTER,CONVERTER ETC
- FACTORY AUTOMATION PRODUCT LINE
- MOTOR-DRIVEN Equipments
- OA Equipments
- Measuring Equipments
- Numerical Control Equipments


SPECIFICATIONS

MODEL	WT - RC30 - SF
RATED CURRENT	30A
RATED VOLTAGE	250 VAC
TEST VOLTAGE	2,500V 10mA between I/O terminals and Earth for 1 minute
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and case
LEAKAGE CURRENT	1mA Max
TEMPERATURE RISE	30°C Max
OPERATING TEMPERATURE	-25 ~ +85°C

Block Diagram

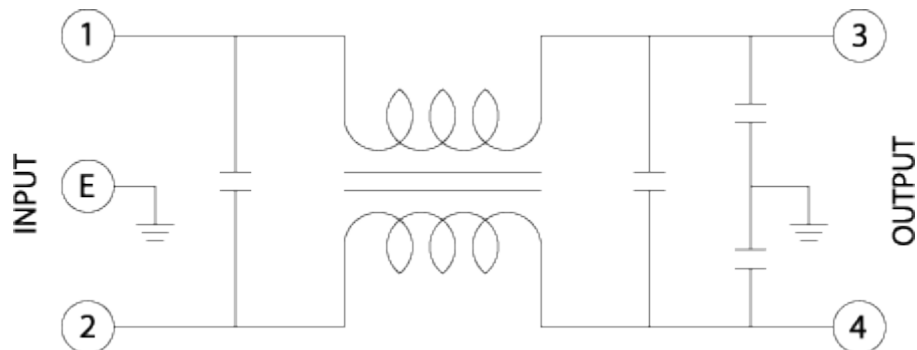

■Dimensions (Units:mm)

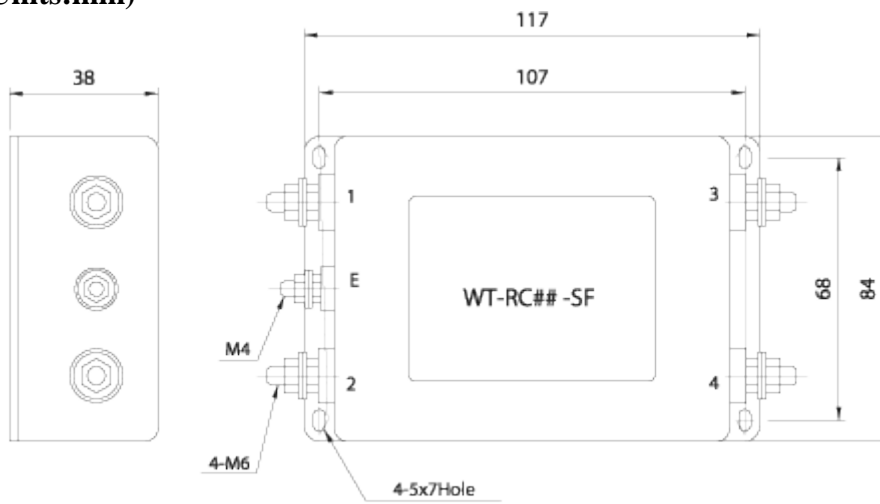

Tolerance:±1