

WT-RC□□-SF(2)

■ SPECIFICATIONS

- Suitable for FCC,FIZ
- Confidency by metal case
- Excellent Filtering
- Low leakage
- Confidency by Epoxy Coverage
- Best characteristic in high voltage

■ APPLICATIONS


- AVR,UPS,INVERTER,CONVERTER ETC
- FACTORY AUTOMATION PRODUCT LINE
- MOTOR-DRIVEN Equipments
- OA Equipments
- Measuring Equipments
- Numerical Control Equipments




■ SPECIFICATIONS

MODEL	WT - RC40 - SF	WT - RC50 - SF
RATED CURRENT	40A	50A
RATED VOLTAGE	250 VAC	
TEST VOLTAGE	2,500V 10mA between I/O terminals and Earth for 1 minute	
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and case	
LEAKAGE CURRENT	1mA Max	
TEMPERATURE RISE	30°C Max	
OPERATING TEMPERATURE	-25 ~ +85°C	

■ Block Diagram

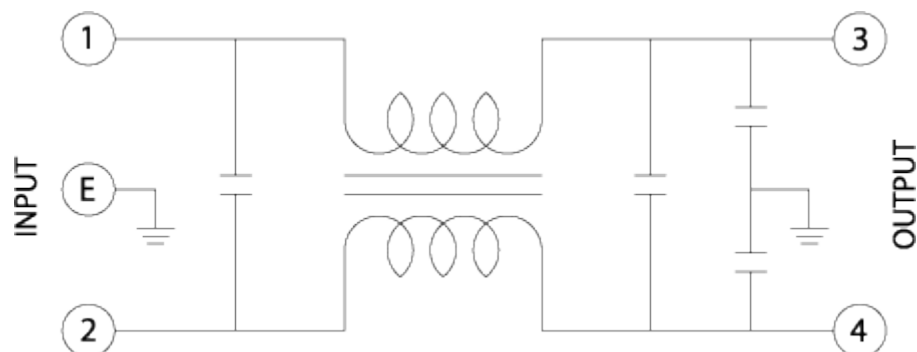

■ Dimensions (Units:mm)

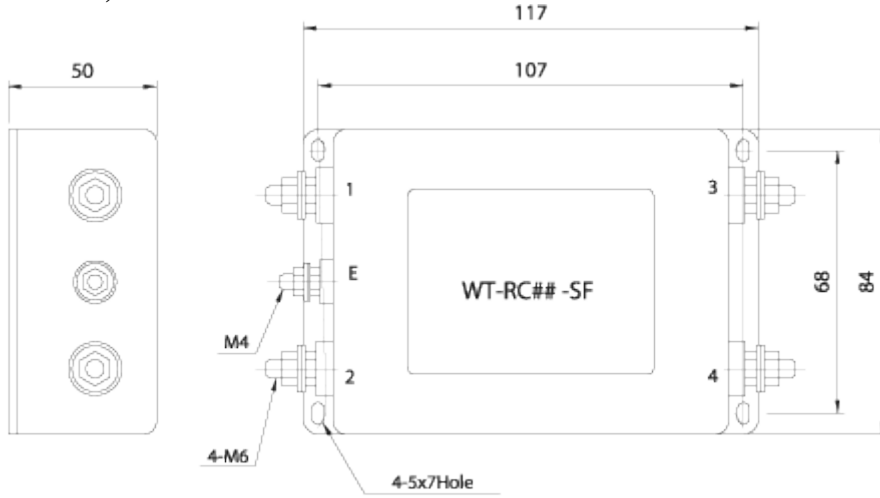

Tolerance:±1