

## WT-RC□□-SF(4)

### ■ SPECIFICATIONS

- Suitable for FCC, FIZ
- Confidentiality by metal case
- Excellent Filtering
- Low leakage
- Confidentiality by Epoxy Coverage
- Best characteristic in high voltage

### ■ APPLICATIONS


- AVR, UPS, INVERTER, CONVERTER ETC
- FACTORY AUTOMATION PRODUCT LINE
- MOTOR-DRIVEN Equipments
- OA Equipments
- Measuring Equipments
- Numerical Control Equipments




### ■ SPECIFICATIONS

MODEL	WT - RC100 - SF	WT - RC120 - SF	WT - RC150 - SF
RATED CURRENT	100A	120A	150A
RATED VOLTAGE	250 VAC		
TEST VOLTAGE	2,500V 10mA between I/O terminals and Earth for 1 minute		
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and case		
LEAKAGE CURRENT	1mA Max		
TEMPERATURE RISE	30°C Max		
OPERATING TEMPERATURE	-25 ~ +85°C		

### ■ Block Diagram

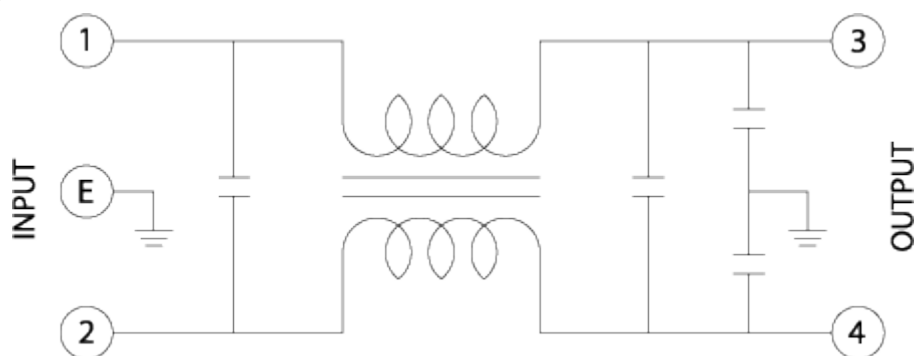

■ Dimensions (Units:mm)

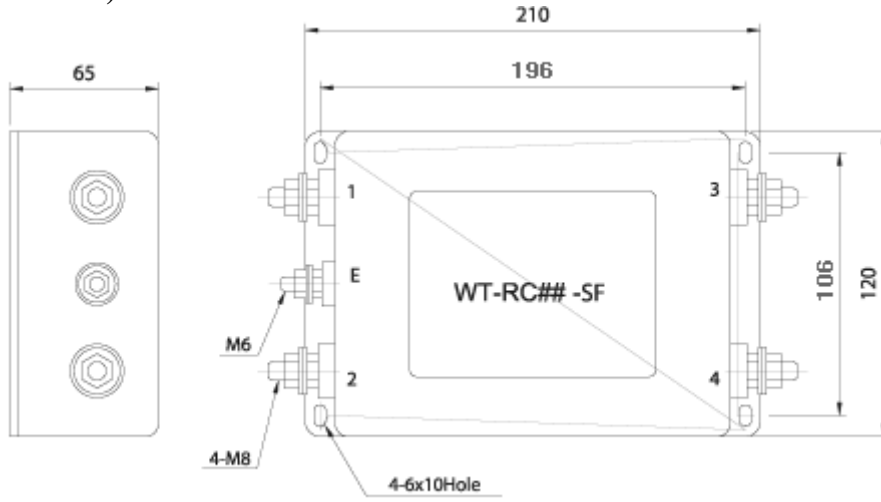

Tolerance:±1