


## WS-2000(2)

### SPECIFICATIONS

- Suitable for FCC,FIZ
- Confidency by metal case
- Excellent Filtering
- Low leakage
- Confidency by Epoxy Coverage
- Best characteristic in high voltage
-  Approved




### APPLICATIONS

- AVR,UPS,INVERTER,CONVERTER ETC
- FACTORY AUTOMATION PRODUCT LINE
- MOTOR-DRIVEN Equipments
- OA Equipments
- Measuring Equipments
- Numerical Control Equipments

### SPECIFICATIONS

MODEL	WS - 2030	WS - 2040	WS - 2050	WS - 2060
RATED CURRENT	30A	40A	50A	60A
RATED VOLTAGE	250 VAC			
TEST VOLTAGE	2,500V 10mA between I/O terminals and Earth for 1 minute			
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and case			
LEAKAGE CURRENT	1mA Max			
TEMPERATURE RISE	30°C Max			
OPERATING TEMPERATURE	-25 ~ +85°C			

### Block Diagram

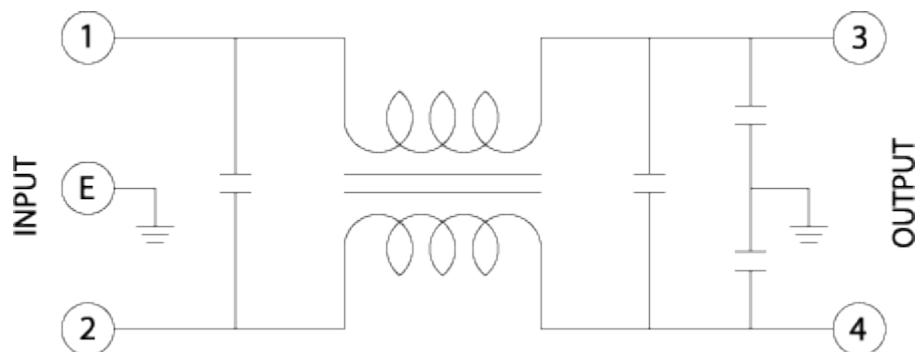

■ Dimensions (Units:mm)

