

WS-2□□□(1)

SPECIFICATIONS

- Suitable for FCC,FIZ
- Confidency by metal case
- Excellent Filtering
- Low leakage
- Confidency by Epoxy Coverage
- Best characteristic in high voltage
- **CE TUV Approved**




APPLICATIONS

- AVR,UPS,INVERTER,CONVERTER ETC
- FACTORY AUTOMATION PRODUCT LINE
- MOTOR-DRIVEN Equipments
- OA Equipments
- Measuring Equipments
- Numerical Control Equipments

SPECIFICATIONS

MODEL	WS - 2005	WS - 2006	WS - 2010	WS - 2015	WS - 2020
RATED CURRENT	5A	6A	10A	15A	20A
RATED VOLTAGE	250 VAC				
TEST VOLTAGE	2,500V 10mA between I/O terminals and Earth for 1 minute				
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and case				
LEAKAGE CURRENT	1mA Max				
TEMPERATURE RISE	30°C Max				
OPERATING TEMPERATURE	-25 ~ +85°C				

Block Diagram

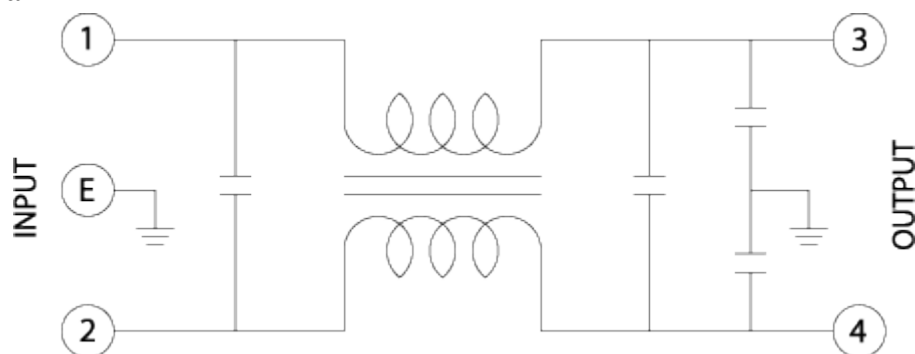

■ Dimensions (Units:mm)

