

**WS-2□□□(3)**

**SPECIFICATIONS**

- Suitable for FCC,FIZ
- Confidency by metal case
- Excellent Filtering
- Low leakage
- Confidency by Epoxy Coverage
- Best characteristic in high voltage
- **CE TUV Approved**




**APPLICATIONS**

- AVR,UPS,INVERTER,CONVERTER ETC
- FACTORY AUTOMATION PRODUCT LINE
- MOTOR-DRIVEN Equipments
- OA Equipments
- Measuring Equipments
- Numerical Control Equipments

**SPECIFICATIONS**

MODEL	WS - 2080	WS - 2100	WS - 2120	WS - 2150
RATED CURRENT	80A	100A	120A	150A
RATED VOLTAGE	250 VAC			
TEST VOLTAGE	2,500V 10mA between I/O terminals and Earth for 1 minute			
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and case			
LEAKAGE CURRENT	1mA Max			
TEMPERATURE RISE	30°C Max			
OPERATING TEMPERATURE	-25 ~ +85°C			

**Block Diagram**

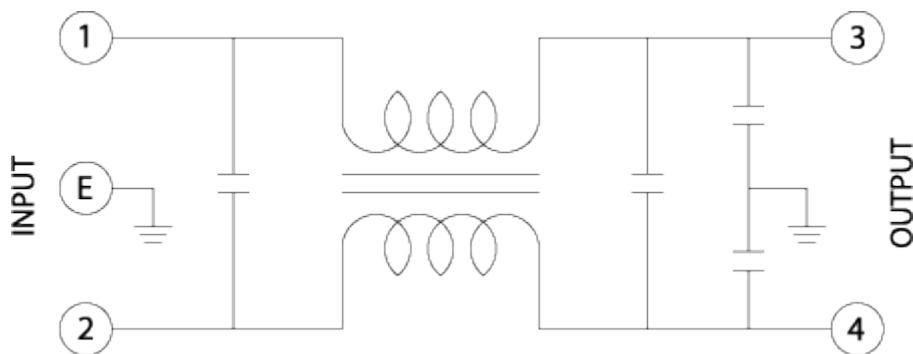

■ Dimensions (Units:mm)

