

TWT-RC□□-450(6)

■SPECIFICATIONS

- 3-Phase,3-Wire method
- High performance under small leakage current
- Efficient performance under motor noise
- High filterings by double filters
- Excellent Filtering for Normal Mode and Common Mode Noise

■APPLICATIONS


- General Purpose, Inverter
- FA and OA Equipments
- Personal Computer and peripherals.
- Digital and Measuring Equipments
- Communication Equipments



■SPECIFICATIONS

| MODEL | TWT - RC450 - 450 |
|-----------------------|--|
| RATED CURRENT | 450 A |
| RATED VOLTAGE | 450 VAC |
| TEST VOLTAGE | 1,500V 10mA between I/O terminals and Earth for 1 minute |
| INSULATION VOLTAGE | 500VDC 300Mohm between I/O terminals and Earth |
| LEAKAGE CURRENT | 2 mA Max |
| TEMPERATURE RISE | 40°C Max |
| OPERATING TEMPERATURE | -25 ~ +85°C |

■Block Diagram

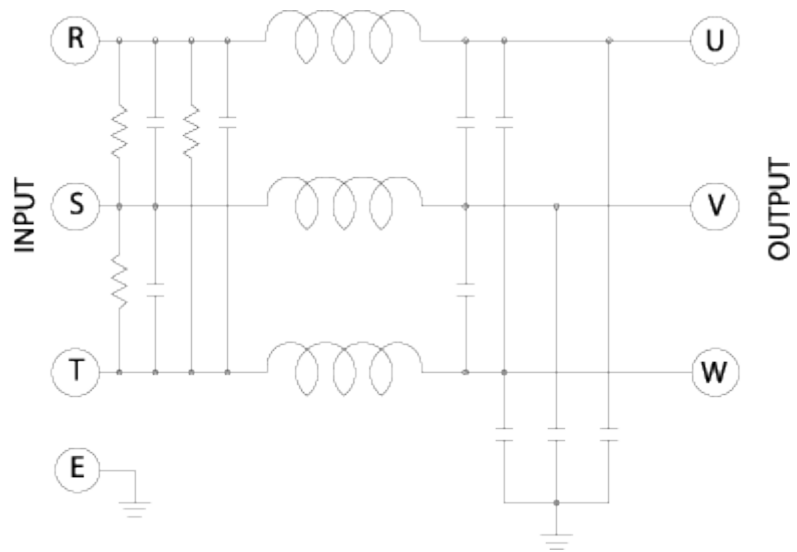

■ Dimensions (Units:mm)

