

TWT-RC□□-450(3)

■SPECIFICATIONS

- 3-Phase,3-Wire method
- High performance under small leakage current
- Efficient performance under motor noise
- High filterings by double filters
- Excellent Filtering for Normal Mode and Common Mode Noise




■APPLICATIONS

- 4üë,For INVERTER
- FA and OA Equipments
- Personal Computer and peripherals.
- Digital and Measuring Equipments
- Communication Equipments

■SPECIFICATIONS

| MODEL | TWT - RC50 - 450 | TWT - RC60 - 450 | TWT - RC80 - 450 | TWT - RC100 - 450 | TWT - RC120 - 450 |
|-----------------------|--|---------------------|---------------------|----------------------|----------------------|
| RATED CURRENT | 50A | 60A | 80A | 100A | 120A |
| RATED VOLTAGE | 450 VAC | | | | |
| TEST VOLTAGE | 1,500V 10mA between I/O terminals and Earth for 1 minute | | | | |
| INSULATION VOLTAGE | 500VDC 300Mohm between I/O terminals and Earth | | | | |
| LEAKAGE CURRENT | 2 mA Max | | | | |
| TEMPERATURE RISE | 40°C Max | | | | |
| OPERATING TEMPERATURE | -25 ~ +85°C | | | | |

■Block Diagram

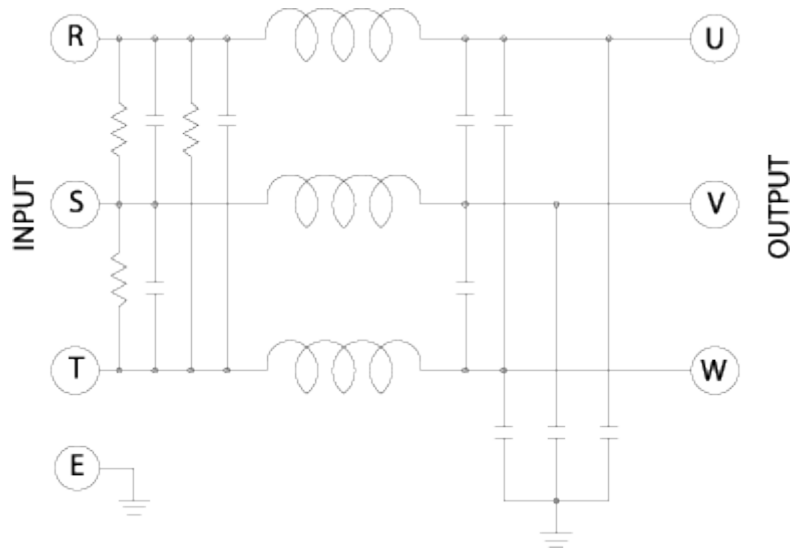

■ Dimensions (Units:mm)

