

TWT-RC□□-NF(6)

■SPECIFICATIONS

- 3-Phase,3-Wire method
- High performance under small leakage current
- Efficient performance under motor noise
- High filterings by double filters
- Excellent Filtering for Normal Mode and Common Mode Noise




■APPLICATIONS

- Industrial and Medical Equipments.
- FA and OA Equipments
- Personal Computer and peripherals.
- Digital and Measuring Equipments
- Communication Equipments

■SPECIFICATIONS

| MODEL | TWT - RC250 - NF | TWT - RC300 - NF |
|-----------------------|--|------------------|
| RATED CURRENT | 250A | 300A |
| RATED VOLTAGE | 250 VAC | |
| TEST VOLTAGE | 1,500V 10mA between I/O terminals and Earth for 1 minute | |
| INSULATION VOLTAGE | 500VDC 300Mohm between I/O terminals and Earth | |
| LEAKAGE CURRENT | 1 mA Max | |
| TEMPERATURE RISE | 40°C Max | |
| OPERATING TEMPERATURE | -25 ~ +85°C | |

■Block Diagram

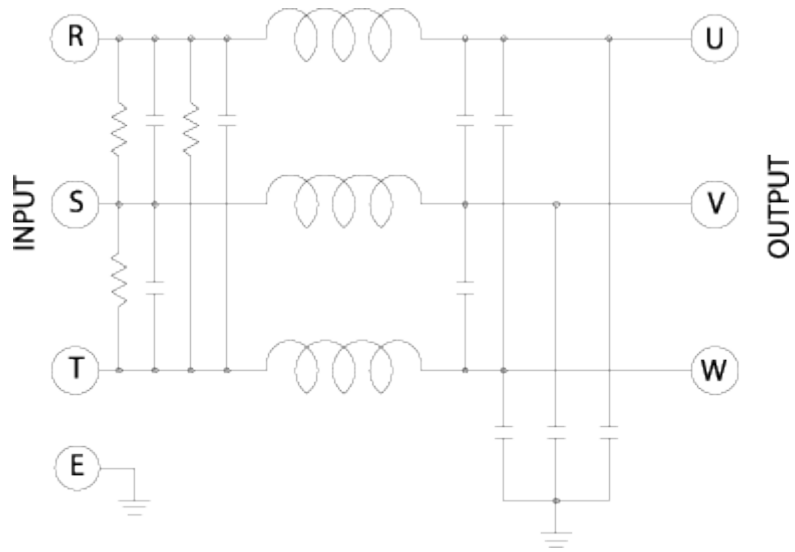

■ Dimensions (Units:mm)

