

TWT-RC□□-NF(3)

■SPECIFICATIONS

- 3-Phase,3-Wire method
- High performance under small leakage current
- Efficient performance under motor noise
- High filterings by double filters
- Excellent Filtering for Normal Mode and Common Mode Noise




■APPLICATIONS

- Industrial and Medical Equipments.
- FA and OA Equipments
- Personal Computer and peripherals.
- Digital and Measuring Equipments
- Communication Equipments

■SPECIFICATIONS

MODEL	TWT - RC30 - NF	TWT - RC40 - NF	TWT - RC50 - NF	TWT - RC60 - NF
RATED CURRENT	30A	40A	50A	60A
RATED VOLTAGE	250 VAC			
TEST VOLTAGE	1,500V 10mA between I/O terminals and Earth for 1 minute			
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and Earth			
LEAKAGE CURRENT	1 mA Max			
TEMPERATURE RISE	40°C Max			
OPERATING TEMPERATURE	-25 ~ +85°C			

■Block Diagram

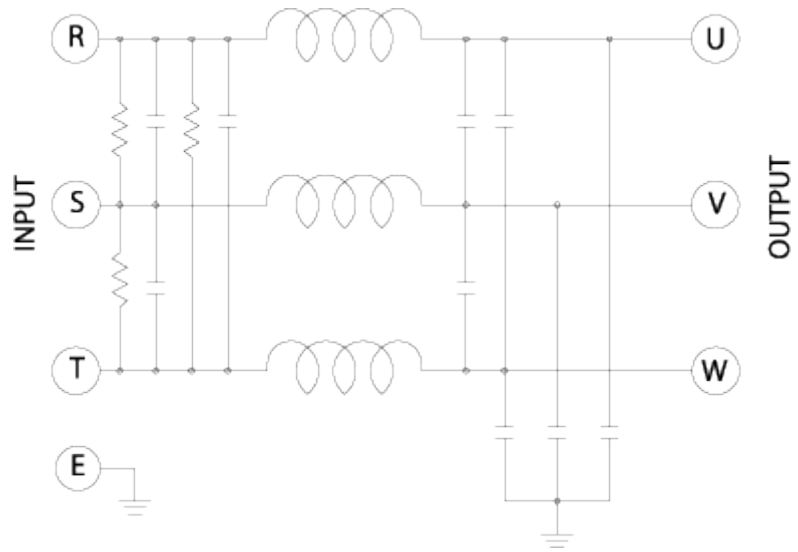

■ Dimensions (Units:mm)

