

TWT-RC□□-NF(4)

■SPECIFICATIONS

- 3-Phase,3-Wire method
- High performance under small leakage current
- Efficient performance under motor noise
- High filterings by double filters
- Excellent Filtering for Normal Mode and Common Mode Noise




■APPLICATIONS

- Industrial and Medical Equipments.
- FA and OA Equipments
- Personal Computer and peripherals.
- Digital and Measuring Equipments
- Communication Equipments

■SPECIFICATIONS

MODEL	TWT - RC80 - NF	TWT - RC100 - NF	TWT - RC120 - NF
RATED CURRENT	80A	100A	120A
RATED VOLTAGE	250 VAC		
TEST VOLTAGE	1,500V 10mA between I/O terminals and Earth for 1 minute		
INSULATION VOLTAGE	500VDC 300Mohm between I/O terminals and Earth		
LEAKAGE CURRENT	1 mA Max		
TEMPERATURE RISE	40°C Max		
OPERATING TEMPERATURE	-25 ~ +85°C		

■Block Diagram

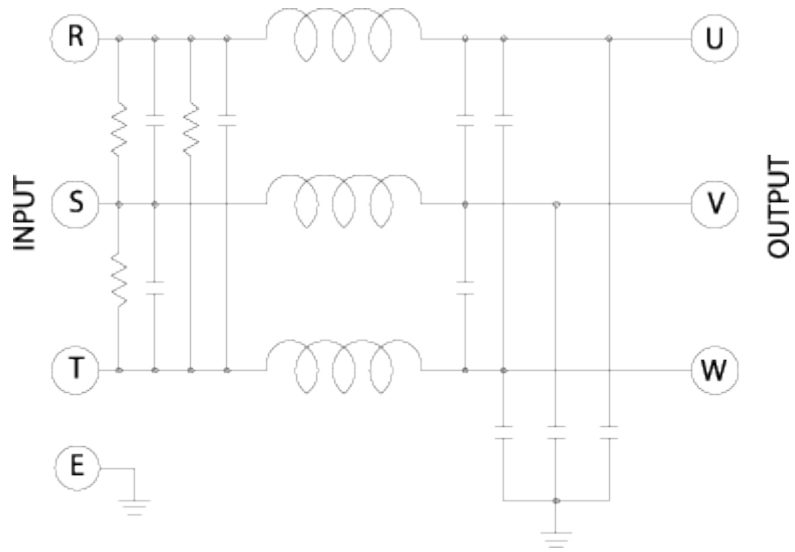

Dimensions (Units:mm)

