

## TWS-4000(5)

### ■ SPECIFICATIONS

- 3-Phase,3-Wire method
- High performance under small leakage current
- Efficient performance under motor noise
- High filterings by double filters
- Excellent Filtering for Normal Mode and Common Mode Noise
- Bus bars for convenient
- Protection plastic covers optionally available for unsurpassed safety




### ■ APPLICATIONS

- Industrial and Medical Equipments.
- FA and OA Equipments
- Personal Computer and peripherals.
- Digital and Measuring Equipments
- Communication Equipments

### ■ SPECIFICATIONS

MODEL	TWS - 4380	TWS - 4450	TWS - 4500
RATED CURRENT	380A	450A	500A
RATED VOLTAGE	450 VAC		
TEST VOLTAGE	2,000V 10mA between I/O terminals - case for 1 minute		
INSULATION RESISTANCE	500VDC 300Mohm between I/O terminals - case		
LEAKAGE CURRENT	1 mA Max		
TEMPERATURE RISE	40°C Max		
OPERATING TEMPERATURE	-25 ~ +85°C		

### ■ Block Diagram

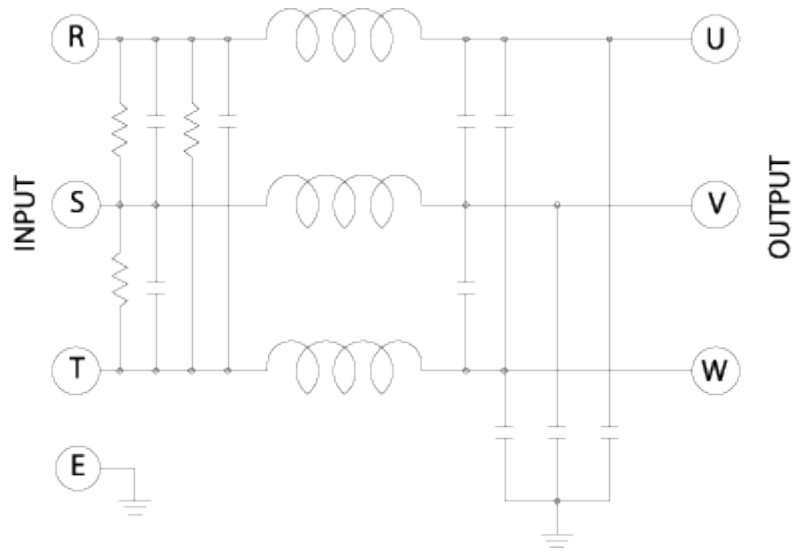

■ Dimensions (Units:mm)

